


# TP#OPENING FLATLIGHT

flat glass, with chain motor

- CUSTOMISABLE DOUBLE-GLAZING ✓
- ALSO SUITABLE FOR DOMESTIC APPLICATIONS ✓
- MOTORE INTEGRATED INTO FRAME ✓
- SUPPLIED ASSEMBLED ✓

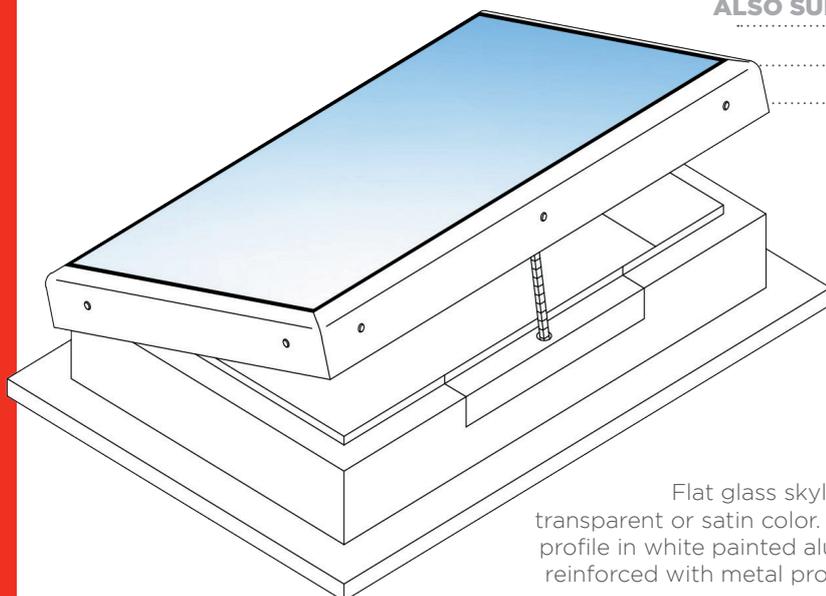


► Overall view of the TP#OPENING FLATLIGHT device

Flat glass skylight available in various thickness combinations, transparent or satin color. The perimeter frame consists of an external box profile in white painted aluminum and an internal box profile in white PVC reinforced with metal profiles. The glass is sealed using structural sealing.

- ACCESSORIES:
- Fixed mosquito net
- Mobile blackout blind
- Mobile blackout blind/mosquito net

The supply includes an insulated frame on which the hinged frame is mounted, containing the chain motor. The fittings are always included, and the 3D design ensures the appropriate type and number for each application.

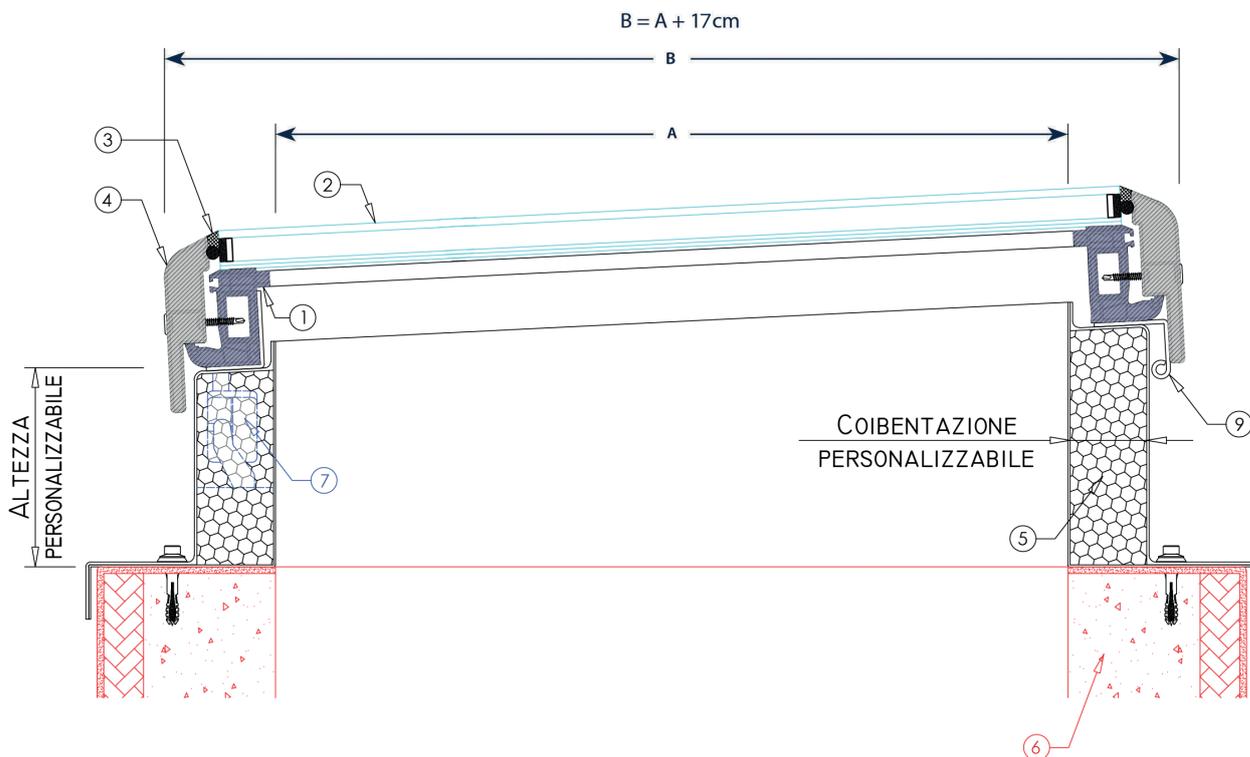

1. Internal frame in white PVC
2. Tempered + laminated glass
3. Structural sealing
4. External frame in white painted aluminum
5. Insulating panel made of expanded polyurethane
6. Existing lintel or curb
7. Integrated 230V AC chain motor (24V DC version available)
8. Stainless steel hinge

NOTE: TP#FLATLIGHT Install with a slope ranging from 3° to 30° to prevent water from pooling on the glass

All curbs have a standard slope of 3°. Different slopes are available upon request.

